


DIMMER COMPATIBILITY MR11 + MR16

BASIC INFORMATION:

1. WHAT IS THE PRODUCT CODE AND WHERE DO I FIND IT?



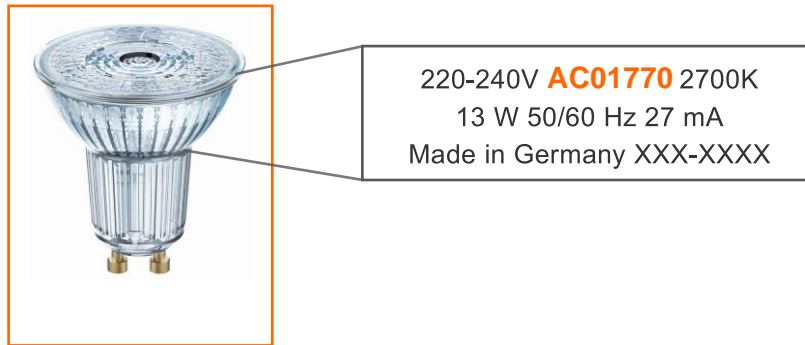

The product code describes the lamp type. It contains 7 letters and digits and is starting with "A". Below an example for the product code of the stamp of the lamp:



2. HOW CAN I READ THE FOLLOWING CHARTS?

Legend:
Information about the dimmability of the lamps. Green means very good dimmability, yellow means limited dimmability, red means undesired dimmability etc.

List of dimmers tested in laboratory conditions

Legend					SUPERSTAR PAR16 35 36°				SUPERSTAR PAR16 50 36°				SUPERSTAR PAR16 80 36°				SUPERSTAR PAR16 80 120°			
Very good dimmability with indicated number of lamps (dimming range greater than 75%)																				
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)					EAN/Basic Code				EAN/Basic Code				EAN/Basic Code				EAN/Basic Code			
Undesired dimmability					4052839330153/AC01184				405283933017/AC01187				4052839330218/AB41905				405807503658/AC03043			
Not relevant					4052839330157/AC01182				4052839330195/AC01184				4052839330232/AB41906				405807503652/AC03051			
Not tested					Number of Lamps				Number of Lamps				Number of Lamps				Number of Lamps			
Dimmer					Dimming range		Dimming range		Dimming range		Dimming range		Dimming range		Dimming range		Dimming range			
Brand	Model	Voltage range	Power	Type	1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%	1-20	98% - 15%	2-20	97% - 12%	2-20	98% - 16%	2-20	98% - 16%
ABB	STD 50-3	230/50Hz	60-500	L	1-10	98% - 15%	1-10	97% - 26%	1-9	97% - 15%	1-9	97% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%
Altenburger Electronic	50 30	230/50Hz	15-350	T	1-10	98% - 15%	1-10	97% - 26%	1-9	97% - 15%	1-9	97% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%
ALPORA	DSP 400	230/50Hz	400	L	1-10	98% - 15%	1-10	97% - 26%	1-9	97% - 15%	1-9	97% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%
Berker	2861	230/50Hz	50-420	U	1-10	98% - 15%	1-10	97% - 26%	1-9	97% - 15%	1-9	97% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%
Blicino	L/NNT441N	230/50Hz			1-10	98% - 15%	1-10	97% - 26%	1-9	97% - 15%	1-9	97% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%
Blicino	L/NNT4408	230/50Hz			1-10	98% - 15%	1-10	97% - 26%	1-9	97% - 15%	1-9	97% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%
Blicino	NT4402N	230/50Hz	500	R	1-10	98% - 15%	1-10	97% - 26%	1-9	97% - 15%	1-9	97% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%
Busch-Jaeger	6513 U-102	230/50Hz	40-420	T	1-10	98% - 15%	1-10	97% - 26%	1-9	97% - 15%	1-9	97% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%
Busch-Jaeger	6523 U-102	230/50Hz	420	T	1-10	98% - 15%	1-10	97% - 26%	1-9	97% - 15%	1-9	97% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%
Busch-Jaeger	2250 U	230/50Hz	60-600	L	1-10	98% - 15%	1-10	97% - 26%	1-9	97% - 15%	1-9	97% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%
Busch-Jaeger	6526 U	230/50Hz			1-10	98% - 15%	1-10	97% - 26%	1-9	97% - 15%	1-9	97% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%
Busch-Jaeger	2247 U-500	230/50Hz			1-10	98% - 15%	1-10	97% - 26%	1-9	97% - 15%	1-9	97% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	L	1-10	98% - 15%	1-10	97% - 26%	1-9	97% - 15%	1-9	97% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%
DINUY	RE EL1LE1	230/50Hz	400	LED	1-10	98% - 15%	1-10	97% - 26%	1-9	97% - 15%	1-9	97% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%
ELKO	400GLI	230/50Hz			1-10	98% - 15%	1-10	97% - 26%	1-9	97% - 15%	1-9	97% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%
ELKO	315GLE	230/50Hz	20-315	T	1-10	98% - 15%	1-10	97% - 26%	1-9	97% - 15%	1-9	97% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%
ELKO	600GLI	230/50Hz	40-600	U	1-10	98% - 15%	1-10	97% - 26%	1-9	97% - 15%	1-9	97% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%
ELKO	420GLEI	230/50Hz	40-420	U	1-10	98% - 15%	1-10	97% - 26%	1-9	97% - 15%	1-9	97% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%	1-10	98% - 15%

Information about the LEDVANCE lamp type

Assessment of the results into categories. Includes the number of lamps and the related dimming range

DIMMER COMPATIBILITY MR11 + MR16

BASISINFORMATIONEN:

1. WAS IST DER PRODUKTCODE UND WO FINDE ICH IHN?

Der Produktcode beschreibt den Lampentyp. Er besteht aus sieben Buchstaben und Ziffern und beginnt mit einem "A". Nachfolgend ein Beispiel eines Produktcodes auf dem Aufdruck der Lampe.



220-240V **AC01770** 2700K
 13 W 50/60 Hz 27 mA
 Made in Germany XXX-XXXX

2. WIE LESE ICH DIE FOLGENDEN TABELLEN?

Legende: Angaben zur Dimmbarkeit der Lampen. Grün bedeutet eine sehr gute Dimmbarkeit mit der angegebenen Lampenanzahl, gelb bedeutet eine eingeschränkte Dimmbarkeit, rot bedeutet, dass unerwünschtes dimmverhalten auftreten kann etc.







Liste der getesteten Dimmer

Legend					SUPERSTAR							
Very good dimmability with indicated number of lamps (dimming range greater than 75%)					PAR16 35 36*	PAR16 50 36*	PAR16 60 36*	PAR16 60 120*				
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)												
Undesired dimmability					EAN/ Basic Code	EAN/ Basic Code	EAN/ Basic Code	EAN/ Basic Code				
Not relevant					405283330133/AC01184	405283330171/AC01187	405283330210/AB41305	405807503668/AC03049				
Not tested					405283330157/AC01192	405283330199/AC01194	405283330232/AB41306	405807503632/AC03051				
Dimmer					Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range
ABB	STD 50-3	230V50Hz	60-500	L	1-20	98%-15%	1-13	98%-20%	1-8	97%-23%	1-8	97%-23%
Altenburger Electronic	50 30	230V50Hz	15-350	T	2-20	98%-15%	2-20	97%-12%	2-20	98%-16%	2-20	98%-16%
AURORA	DSP 400	230V50Hz	400	L	1-10	98%-15%	2-10	97%-14%	1-4	96%-1%	1-4	96%-1%
Berker	2861	230V50Hz	50-420	U	1-20	98%-27%	1-20	98%-25%	1-20	97%-27%	1-20	97%-27%
Bicimo	LJNNT441N	230V50Hz			1-15	98%-1%	1-10	97%-5%	1-6	94%-7%	1-6	94%-7%
Bicimo	LJNNT4408	230V50Hz			2-20	98%-1%	2-9	98%-1%	1-6	97%-3%	1-6	97%-3%
Bicimo	NT4402N	230V50Hz	500	R	3-18	99%-19%	2-12	97%-19%	1-8	95%-22%	1-8	95%-22%
Busch-Jaeger	6513 U-102	230V50Hz	40-420	T	2-20	98%-15%	2-20	98%-17%	2-20	98%-21%	2-20	98%-21%
Busch-Jaeger	6523 U-102	230V50Hz	420	T	1-10	96%-22%	1-10	97%-26%				
Busch-Jaeger	2250 U	230V50Hz	60-600	L	1-10		2-14	98%-16%	1-9	97%-15%	1-9	97%-15%
Busch-Jaeger	6526 U	230V50Hz			1-13	98%-34%	1-10	97%-35%	1-5		1-5	
Busch-Jaeger	2247 U-500	230V50Hz			1-20	98%-15%	1-13	98%-20%	1-8	97%-23%	1-8	97%-23%
CENTURY CONTROL	MULTI DIMMER	230V50Hz	60-600	L	2-13	98%-1%	1-10	98%-5%	1-6	97%-9%	1-6	97%-9%
DINJY	RE EL1LE1	230V50Hz	400	LED	1-11	98%-1%	1-10	98%-1%	1-5	99%-7%	1-5	99%-7%
ELKO	400GLI	230V50Hz			1-10		1-13		1-4	97%-1%	1-4	97%-1%
ELKO	316GLE	230V50Hz	20-315	T	2-20	98%-6%	1-20	98%-7%	1-20	97%-10%	1-20	97%-10%
ELKO	600GLI	230V50Hz	40-600	U	1-20	98%-1%	1-13	97%-1%	1-8	96%-1%	1-8	96%-1%
ELKO	420GLEI	230V50Hz	40-420	U	1-14	98%-1%	1-13	97%-4%	1-10	97%-19%	1-10	97%-19%







Angaben zum LEDVANCE Lampentyp

Bewertung der Testergebnisse in Ampel Kategorien. Beinhaltet sowohl die Lampenanzahl als auch den dimmbaren Bereich







DIMMER COMPATIBILITY MR11 + MR16

Legend						LED SUPERSTAR MR16 20	LED SUPERSTAR MR16 35	LED SUPERSTAR MR16 50	LED SUPERSTAR PLUS MR16 50	LED SUPERSTAR MR11 20	LED SUPERSTAR MR11 35	
Good dimmability with indicated number of lamps (dimming range greater than 75%)												
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)												
Undesired dimmability												
Not tested												
						EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	
						405807576690 / AC57993	405807576737 / AC57998	405807543324 / AC57978	405807561225 / AC58014	4058075433083 / AC45658	4058075433229 / AC45659	
Brand	Model	Voltage range	Power	Type	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps
ABB	STD 50-3	230/50Hz	60-500	L	100-19%	100-19%	100-19%	100-19%	100-19%	100-29%	92-15%	100-0%
Attenburger	50_3	230/50Hz			89-28%	89-28%	89-28%	89-28%	89-28%	100-23%	100-29%	100-17%
AURORA	DSP400	230/50Hz	400	T	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	75-0%
Berker	2861	230/50Hz	50-420	U	100-0%	100-11%	100-11%	100-11%	100-11%	100-16%	100-32%	100-27%
Bticino	LN/NT4411 N HCHD/HS44 11	230/50Hz			100-0%	100-9%	100-0%	100-9%	100-0%	100-9%	79-0%	
Bticino	NT4402N	230/50Hz	500	R								
BTicino	RW4411				85-0%	85-0%	85-0%	85-0%	85-0%	85-0%		
BTicino	HD4411				85-0%	85-0%	85-0%	85-0%	85-0%	85-0%		
Busch-Jaeger	6513 U-102	230/50Hz	420		100-47%	100-47%	100-47%	100-47%	100-47%	100-47%	100-38%	100-34%
Busch-Jaeger	6523 U-102	230/50Hz	40-420		100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-12%	100-0%
Busch-Jaeger	2250 U	230/50Hz	60-600	L	98-0%	100-0%	98-0%	100-0%	98-0%	100-0%		
Busch-Jaeger	6526 U	230/50Hz										
NTURY/CONF+ULTI DIMMEF		230/50Hz	60-600	U	89-0%	90-29%	89-0%	90-29%	89-0%	90-29%	100-0%	100-0%
DimMax	420SL	230/50Hz	200	L/T	93-0%	100-0%	93-0%	100-0%	93-0%	100-0%	100-0%	100-0%
DINUY	RE L1 LE1	230/50Hz	400	LED	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%
DINUY	RE PLALE 1				100-0%	100-0%	100-0%	100-0%	100-0%			
DINUY	RE PLALE 0				100-0%	100-0%	100-0%	100-0%	100-0%			
Domintel	3imMax 420 SI	230/50Hz	200	L/T	93-0%	100-0%	93-0%	100-0%	93-0%	100-0%	100-0%	100-0%
EcoDIM	0.3-450W Led Dimmer				85-0%	85-0%	85-0%	85-0%	85-0%	85-0%		
ELKO	400GLI	230/50Hz			91-9%	84-9%	91-9%	84-9%	91-9%	84-9%	100-0%	60-0%
ELKO	315GLE	230/50Hz	20-315	T	84-0%	92-0%	84-0%	92-0%	84-0%	92-0%	100-0%	96-0%
ELKO	600GLI	230/50Hz	40-600	U	100-11%	100-0%	100-11%	100-0%	100-11%	100-0%	100-14%	100-0%
ELKO	600GLEA	230/50Hz			84-0%	89-0%	84-0%	89-0%	84-0%	89-0%	100-0%	100-0%
ELKO	420GLEA	230/50Hz	40-420	U	100-0%	100-9%	100-0%	100-9%	100-0%	100-9%	100-14%	100-12%
ELKO	1000LRI	230/50Hz			100-0%	100-0%	100-0%	100-0%	100-0%	100-0%		
ELKO	630GLE	230/50Hz	20-630	U	84-17%	100-13%	84-17%	100-13%	84-17%	100-13%	81-26%	100-14%
Eltako	!UDE1NPN-UC	230/50Hz	5-400	R/L/C	93-9%	100-19%	93-9%	100-19%	93-9%	100-19%	100-0%	100-0%
ELTAKO	!UDE1NPN-UC				100-0%	100-0%	100-0%	100-0%	100-0%	100-0%		
Fetler	40200.LEDxxx	230/50Hz			89-17%	93-11%	89-17%	93-11%	89-17%	93-11%	100-23%	100-26%
Fetler	40600.RL	230/50Hz			100-11%	100-0%	100-11%	100-0%	100-11%	100-0%	100-14%	100-9%
Fetler	40600.RC	230/50Hz			84-17%	100-13%	84-17%	100-13%	84-17%	100-13%	81-26%	100-14%
Fetler	40600.RLC	230/50Hz	20-600	U	84-0%	89-0%	84-0%	89-0%	84-0%	89-0%	100-0%	100-0%
Fetler	40420.RLC	230/50Hz			100-0%	100-9%	100-0%	100-9%	100-0%	100-9%	100-14%	100-12%
Fetler	31000	230/50Hz			100-0%	100-0%	100-0%	100-0%	100-0%	100-0%		
FINDER	!21.8.230.0200				100-0%	100-0%	100-0%	100-0%	100-0%	100-0%		
FINDER	!21.8.230.8300				100-15%	100-10%	100-15%	100-10%	100-15%	100-10%		
FINDER	!81.8.230.0500				100-0%	100-0%	100-0%	100-0%	100-0%	100-0%		
FINDER	!11.0.240.0000											
Gira	226200	230/50Hz			90-0%	93-0%	90-0%	93-0%	90-0%	93-0%	100-0%	77-0%
Gira	030700	230/50Hz	20-525	T	92-11%	93-11%	92-11%	93-11%	92-11%	93-11%	100-24%	100-29%
Gira	117600	230/50Hz	50-420	U	93-9%	100-19%	93-9%	100-19%	93-9%	100-19%	100-14%	100-32%
Gira	238500	230/50Hz									100-0%	100-0%
Gira	217400	230/50Hz	4X20-250	KNX-U	100-19%	100-19%	100-19%	100-19%	100-19%	100-19%	100-18%	100-31%
Hager	WUD87	230/50Hz	400	LED-U	100-19%	89-17%	100-19%	89-17%	100-19%	89-17%	100-20%	100-34%
Hamilton	KP1X40	230/50Hz	400		100-9%	100-0%	100-9%	100-0%	100-9%	100-0%		
Hugo Müller	adin 8721101	230/50Hz			100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%
Ion	ED Dimmer 0.3-350 Watt				85-0%	85-0%	85-0%	85-0%	85-0%	85-0%		
Ion	WUW:LED Dimmer 600 Watt				85-0%	85-0%	85-0%	85-0%	85-0%	85-0%		
Ion	ID350W-MKII				90-0%	90-0%	90-0%	90-0%	90-0%	90-0%		
Ion	LED Dimmer 200 Watt				85-0%	85-0%	85-0%	85-0%	85-0%	85-0%		

DIMMER COMPATIBILITY MR11 + MR16

Legend					LED SUPERSTAR MR16 20	LED SUPERSTAR MR16 35	LED SUPERSTAR MR16 50	LED SUPERSTAR PLUS MR16 65, 60, 60	LED SUPERSTAR MR11 20	LED SUPERSTAR MR11 35		
Good dimmability with indicated number of lamps (dimming range greater than 75%)												
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)												
Undesired dimmability												
Not tested												
EAN / Basic Code					4098075796690 / AC57893	4098058323777 / AC57956 4058075796737 / AC57998 4058075796737 / AC57998	4058075433724 / AC57978 4058075433740 / AC57980	4058075613201 / AC58019 4058075613226 / AC58014	4058075433083 / AC45658	4058075433229 / AC45659		
Dimmer					Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps
Brand	Model	Voltage range	Power	Type								
Ion	ID200W-MKII				85-15%	85-15%	85-15%	85-15%	85-15%	85-15%	85-15%	85-15%
Jung	225 NVDE	230/50Hz	20-500		90-0%	93-0%	90-0%	93-0%	90-0%	93-0%	100-0%	100-0%
Jung	225 TDE	230/50Hz			92-11%	93-11%	92-11%	93-11%	92-11%	93-11%	100-24%	100-29%
Jung	254 UDIE1	230/50Hz			93-0%	100-10%	93-0%	100-10%	93-0%	100-10%	100-14%	100-32%
Jung	1224 LEDUCE	230/50Hz	3-100								100-0%	100-0%
Jung	3904 REGHE	230/50Hz			100-19%	100-19%	100-19%	100-19%	100-19%	100-19%	100-18%	100-31%
JUNG	1731DD				100-0%				100-0%		100-0%	
JUNG	UD 1755 REG				100-0%	100-5%	100-0%	100-5%	100-0%	100-5%		
JUNG	1724 DM				85-0%	60-0%	85-0%	60-0%	85-0%	60-0%		
Legrand	665114	230/50Hz	400	U	100-0%	100-9%	100-0%	100-9%	100-0%	100-9%	100-0%	79-0%
Legrand	74319/57433	230/50Hz	400	U	100-0%	100-9%	100-0%	100-9%	100-0%	100-9%	100-0%	79-0%
Legrand	72239/57273	230/50Hz	400	U	100-0%	100-9%	100-0%	100-9%	100-0%	100-9%	100-0%	79-0%
Legrand	78407/07920	230/50Hz	400	U	100-0%	100-9%	100-0%	100-9%	100-0%	100-9%	100-0%	79-0%
Legrand	48869/04887	230/50Hz	400	U	100-0%	100-9%	100-0%	100-9%	100-0%	100-9%	100-0%	79-0%
Legrand	067083/048869	230/50Hz	400	U	100-0%	100-9%	100-0%	100-9%	100-0%	100-9%	100-0%	79-0%
Legrand	099314	230/50Hz	300	RL								
Legrand	770062	230/50Hz	400	RLC	100-9%	100-14%	100-9%	100-14%	100-9%	100-14%	100-3%	100-5%
MASTER	DM-DGL	230/50Hz	1000	U / LED								
MASTER	DM-2500	230/50Hz	2500	U / LED	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%
Merten	4EG5136-000	230/50Hz			84-0%	92-0%	84-0%	92-0%	84-0%	92-0%	100-0%	96-0%
Merten	4EG5134-000	230/50Hz			89-17%	93-11%	89-17%	93-11%	89-17%	93-11%	100-23%	100-26%
Merten	4EG5133-000	230/50Hz			100-11%	100-0%	100-11%	100-0%	100-11%	100-0%	100-14%	100-9%
Merten	4EG5137-000	230/50Hz			84-17%	100-13%	84-17%	100-13%	84-17%	100-13%	81-26%	100-14%
Merten	4EG5139-000	230/50Hz			84-0%	89-0%	84-0%	89-0%	84-0%	89-0%	100-0%	100-0%
Merten	4EG5138-000	230/50Hz				100-9%		100-9%		100-9%	100-14%	100-12%
Merten	1EG 5170-030	230/50Hz	10-200	U							100-14%	100-29%
Merten	MEG 5131	230/50Hz	40-400	L	89-0%	89-0%	89-0%	89-0%	89-0%	89-0%	100-0%	100-0%
Merten	MEG 5132	230/50Hz			89-0%	89-0%	89-0%	89-0%	89-0%	89-0%	100-0%	100-0%
Merten	MEG 5140	230/50Hz	9-100	L	84-0%	89-0%	84-0%	89-0%	84-0%	89-0%	100-0%	78-0%
Merten	MEG 5135	230/50Hz	60-1000	L	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%		
MK	K4501	230/50Hz	180	L		91-0%		91-0%		91-0%	100-6%	100-5%
NEXUS	881P-01	230/50Hz	400	L								100-0%
NIKO	0-019000190	230/50Hz	5-200	U	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%
NIKO	0-007000070	230/50Hz	5-200	U	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	83-14%	100-18%
Odace	SS20512	230/50Hz			89-17%	93-11%	89-17%	93-11%	89-17%	93-11%	100-23%	100-26%
Odace	SS20511	230/50Hz			100-11%	100-0%	100-11%	100-0%	100-11%	100-0%	100-14%	100-9%
Odace	SS20515	230/50Hz				100-9%		100-9%		100-9%	100-14%	100-12%
Odace	SS20518	230/50Hz			84-0%	89-0%	84-0%	89-0%	84-0%	89-0%	100-0%	78-0%
Osnam	T/DALI 315 DII	230/50Hz	20-315	DALI-T	100-13%	100-13%	100-13%	100-13%	100-13%	100-13%	100-14%	100-15%

DIMMER COMPATIBILITY MR11 + MR16

Legend						LED SUPERSTAR MR16 20	LED SUPERSTAR MR16 35	LED SUPERSTAR MR16 50	LED SUPERSTAR PLUS MR16 20-40-50	LED SUPERSTAR MR11 20	LED SUPERSTAR MR11 35					
Good dimmability with indicated number of lamps (dimming range greater than 75%)																
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																
Undesired dimmability																
Not tested																
EAN / Basic Code						4058075796690 / AC5993	4099854033777 / AC0996 4058075796717 / AC0998 4058075296731 / AC0996	4058075433724 / AC0978 4058075433748 / AC0990	4058076132017 / AC0910 405807613225 / AC0910 405807613226 / AC0910	4058075433083 / AC4569	4058075433229 / AC4569					
Dimmer						Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps			
PEHA	435 HAN	230/50Hz	60-600	L	89-0%	84-0%	89-0%	84-0%	89-0%	84-0%	89-0%	84-0%	100-0%	100-0%	68-0%	93-0%
Plejd	DIM-01															
Plejd	DIM-02															
Plejd	RTR-01-SW															
RVE	RV LED 250				100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%
Schneider	400GLI	230/50Hz	40-400	T	91-0%	84-0%	91-0%	84-0%	91-0%	84-0%	91-0%	84-0%	100-0%		60-0%	100-0%
Schneider	SBD315RC	230/50Hz			84-0%	92-0%	84-0%	92-0%	84-0%	92-0%	84-0%	92-0%	100-0%	100-0%	96-0%	100-0%
Schneider	SBD200LED	230/50Hz	400		89-17%	93-11%	89-17%	93-11%	89-17%	93-11%	89-17%	93-11%	100-23%	100-26%	100-10%	100-12%
Schneider	SBD600RL	230/50Hz			100-11%	100-0%	100-11%	100-0%	100-11%	100-0%	100-11%	100-0%	100-14%	100-9%	100-0%	100-0%
Schneider	SBD630RC	230/50Hz			84-17%	100-13%	84-17%	100-13%	84-17%	100-13%	84-17%	100-13%	81-26%		100-14%	
Schneider	SBD600RCL	230/50Hz			84-0%	89-0%	84-0%	89-0%	84-0%	89-0%	84-0%	89-0%		100-0%	100-0%	100-0%
Schneider	SBD420RCL	230/50Hz				100-9%		100-9%		100-9%		100-9%	100-14%	100-12%	100-0%	100-0%
Schneider	5170	230/50Hz											100-14%	100-29%	62-8%	75-17%
Schneider	SBD400RL	230/50Hz			89-0%	89-0%	89-0%	89-0%	89-0%	89-0%	89-0%	89-0%	100-0%	100-0%		100-0%
Schneider	SBD5PL	230/50Hz			84-0%	89-0%	84-0%	89-0%	84-0%	89-0%	84-0%	89-0%	100-0%		78-0%	100-0%
Schneider	ATD1000RL	230/50Hz			100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%				
Scotmore	MD9014				76-0%	76-0%	76-0%	76-0%	76-0%	76-0%	76-0%	76-0%				
Shuttle	HM-T-LED-500	230/50Hz	2-500	T & LED-T	100-0%	100-5%	100-0%	100-5%	100-0%	100-5%	100-0%	100-5%	100-0%	100-0%	100-0%	100-40%
Siemens	5TC8 284	230/50Hz	20-525	T	100-20%	100-20%	100-20%	100-20%	100-20%	100-20%	100-20%	100-20%	100-41%		100-10%	
Siemens	WG1-527-1AB	230/50Hz	20-500	KNX-U	100-19%	100-0%	100-19%	100-0%	100-19%	100-0%	100-19%	100-0%	100-0%	100-0%	100-0%	100-0%
theben	MAX 544 plus	230/50Hz	250	T	100-0%	100-9%	100-0%	100-9%	100-0%	100-9%	100-0%	100-9%	100-23%	100-24%	100-12%	100-14%
theben	HMAX 534 plus	230/50Hz	400	T	100-28%	100-37%	100-28%	100-37%	100-28%	100-37%	100-28%	100-37%	100-0%	100-3%	100-0%	100-0%
VADSBO	LD 220	230/50Hz	1-200	U												
VARILIGHT	HQ3W	230/50Hz	400		100-19%	100-5%	100-19%	100-5%	100-19%	100-5%	100-19%	100-5%	100-0%	100-21%	100-0%	100-13%
VARILIGHT	JQP401W	230/50Hz	400	T	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%		100-0%		
Varilight	MIP120				85-0%	100-0%	85-0%	100-0%	85-0%	100-0%	85-0%	100-0%				
Vimar	20135	230/50Hz	3-100	U	100-19%	100-19%	100-19%	100-19%	100-19%	100-19%	100-19%	100-19%				
YOKIS	MTV 500E/M				85-0%	100-0%	85-0%	100-0%	85-0%	100-0%	85-0%	100-0%				
ZANO	WH401	230/50Hz	400	L	100-0%		100-0%		100-0%		100-0%		100-0%	100-0%	93-0%	90-0%
ZANO	WH251	230/50Hz	250		100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	93-0%	90-0%
ZANO	Z GRID 700	230/50Hz	250	LED												
ZANO	Z GRID 500	230/50Hz	500		91-0%	100-0%	91-0%	100-0%	91-0%	100-0%	91-0%	100-0%				

Please Note:

- The compatibility list is based upon testing conducted by the manufacturer in a lab simulated environment, and the results can vary in certain field applications due to a number of factors. LEDVANCE does not take over any responsibility, warranty or liability that this results can also achieved by using the devices under other conditions, or when using successor models of the tested devices, or different models of the same manufacturer, or when using other LED lamp types
- The absence of a dimmer from this chart does not necessarily imply incompatibility.
- Please reference the dimmer manufacturer's instructions for installation.
- LED lamps contain several electronic components. Under unfavourable conditions these can lead to acoustic noise. In case of resonance even low noise can cause audible effect. Possible factors influencing this are the installation, the design of the lamp holder and the luminaire (acoustic resonance effect) as well as the dimmer or the transformer (harmonics or electronic resonance).
- Subject to change without notice
- Errors and omission excepted
- Always make sure to use the most recent release

Application Notes:

- For best dimming results trailing edge dimmer type is recommended.
- Trailing edge type dimmer requires the neutral wire for installation.

Bitte beachten:

- Die Kompatibilitätsliste basiert auf Tests, die der Hersteller in einer im Labor simulierten Umgebung durchgeführt hat. Die Ergebnisse können aufgrund verschiedener Faktoren in manchen Praxisanwendungen abweichen. LEDVANCE übernimmt keinerlei Verantwortung, Garantie oder Haftung dafür, dass diese Ergebnisse tatsächlich mit den Geräten unter anderen Bedingungen, mit Nachfolgemodellen der getesteten Geräte, mit anderen Modellen desselben Herstellers oder bei Verwendung anderer LED-Lampentypen erreicht werden.
- Das Fehlen eines Dimmers in der Abbildung bedeutet nicht, dass ein Dimmer nicht kompatibel ist.
- Lesen Sie stets die Installationsanweisungen des Dimmerherstellers.
- LED-Lampen bestehen aus mehreren elektronischen Komponenten. Unter ungünstigen Bedingungen können diese Störgeräusche erzeugen. Im Resonanzfall können selbst geringe Geräusche einen hörbaren Effekt hervorrufen. Einflussfaktoren können die Installation, die Gestaltung des Lampenträgers, die Leuchte (akustischer Resonanzeffekt), der Dimmer oder der Trafo (Oberschwingungen oder elektronische Resonanz) sein.
- Änderungen vorbehalten.
- Irrtümer und Auslassungen vorbehalten.
- Vergewissern Sie sich, dass Sie stets die aktuellste Version benutzen.

Anwendungshinweis:

- Um bestmögliche Dimmergebnisse zu erzielen, wird die Verwendung von Phasenabschnitt-Dimmern empfohlen.
- Phasenabschnitt-Dimmer erfordern bei der Installation einen Neutralleiter.

LEDVANCE GmbH

Head Office:

Parkring 1-5
85748 Garching, Germany
Phone +49 89 780673-100
Fax +49 89 780673-XXX
www.ledvance.com