

## PRODUCT DATASHEET

### ENDURA PRO Flood Sensor 15W 4000K IP55

### Dark Gray

ENDURA® PRO FLOOD SENSOR | High efficiency wall sensor luminaires with wide beam angle in innovative optical design



#### Areas of application

- Outdoor
- Parking lots, city squares, parks
- Arcade passage

#### Product benefits

- Homogenous illumination
- Lighting according to requirements due to adjustable luminaire head
- Easy and quick installation

#### Product features

- 4 operating modes selectable (light 6h continuous on, standby, switch-on by movement or dusk)
- Adjustable luminaire head
- Type of protection: IP55
- Impact resistance: IK05
- Protection class: II



---

## TECHNICAL DATA

### Electrical data


|                                                             |               |
|-------------------------------------------------------------|---------------|
| Nominal wattage                                             | 15.00 W       |
| Nominal voltage                                             | 220...240 V   |
| Mains frequency                                             | 50...60 Hz    |
| Nominal current                                             | 8000.000 mA   |
| Inrush current time $T_{h50}$                               | 50 $\mu$ s    |
| Max. number of luminaires per miniature circuit breaker B16 | 94            |
| Max. number of luminaires per miniature circuit breaker C10 | 75            |
| Max. number of luminaires per miniature circuit breaker C16 | 120           |
| Power factor $\lambda$                                      | > 0.88        |
| Protection class                                            | II            |
| Operating mode                                              | Mains voltage |

### Photometrical data

|                                              |               |
|----------------------------------------------|---------------|
| Luminous flux                                | 1500 lm       |
| Luminous efficacy                            | 100 lm/W      |
| Color temperature                            | 4000 K        |
| Light color (designation)                    | Cool White    |
| Color rendering index Ra                     | $\geq 80$     |
| Standard deviation of color matching         | $\leq 6$ sdcn |
| Photobiological safety group acc. to EN62778 | RG1           |
| Photobiological safety group acc. to EN62471 | RG1           |
| Beam angle                                   | 100 °         |

### Dimensions & Weight

|                |           |
|----------------|-----------|
| Length         | 151.00 mm |
| Width          | 56.00 mm  |
| Height         | 205.00 mm |
| Product weight | 365.00 g  |

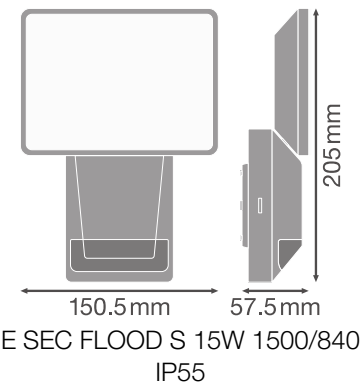

Materials & Colors

|                 |                    |
|-----------------|--------------------|
| Product color   | Dark grey          |
| Housing color   | Dark gray          |
| Body material   | Polycarbonate (PC) |
| Cover material  | Polycarbonate (PC) |
| Mercury content | 0.0 mg             |

Application & Mounting

|                                        |                             |
|----------------------------------------|-----------------------------|
| Ambient temperature range              | -20...+40 °C                |
| Temperature range at storage           | -25...+70 °C                |
| Type of connection                     | Terminal, 3-Pole (L, N, PE) |
| Type of protection                     | IP55                        |
| Protection class IK (shock resistance) | IK05                        |
| Dimmable                               | No                          |
| Mounting type                          | Surface                     |
| Application environment                | Outdoor                     |
| With light source                      | Yes                         |
| Replaceable light source               | No                          |

Lifespan

|                            |                       |
|----------------------------|-----------------------|
| Lifespan L70/B50 at 25 °C  | 30000 h <sup>1)</sup> |
| Lifespan L80/B50 at 25 °C  | 50000 h               |
| Number of switching cycles | 12500                 |

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

## Control gear

|                |              |
|----------------|--------------|
| Output current | 205...260 mA |
|----------------|--------------|

## Sensor

|                        |                        |
|------------------------|------------------------|
| Type of sensor         | Light / Motion         |
| Sensor technology      | Passive infrared (PIR) |
| Sensor detection angle | 180 °                  |

## Certificates &amp; Standards

|                                                      |                 |
|------------------------------------------------------|-----------------|
| Standards                                            | CE / UKCA / EAC |
| Luminaire with limited surface temperature, "D sign" | No              |
| Replaceable light source (EPREL)                     | Not replaceable |

## Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- To reduce the risk of strangulation the flexible wiring connected to this luminaire shall be effectively fixed to the wall if the wiring is within arm's reach.

## DOWNLOAD DATA

| Documents and certificates                                                         |                                        | Document name                 |
|------------------------------------------------------------------------------------|----------------------------------------|-------------------------------|
|  | User instruction / safety instructions | E PRO SPOT S                  |
|  | Legal information                      | Safety insert G11221891       |
|  | Declarations of conformity             | E PRO FLOOD S 15W 840 IP55 DG |
|  | Declarations of conformity UKCA        | E PRO LUM                     |

## LOGISTICAL DATA

| Product code  | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume                |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4099854451706 | Folding box<br>1             | 68 mm x 158 mm x 214 mm              | 518.00 g     | 2.30 dm <sup>3</sup>  |
| 4099854451713 | Shipping box<br>6            | 326 mm x 213 mm x 231 mm             | 3110.00 g    | 16.04 dm <sup>3</sup> |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.